




Section (when fully closed)
(scale 1:10)

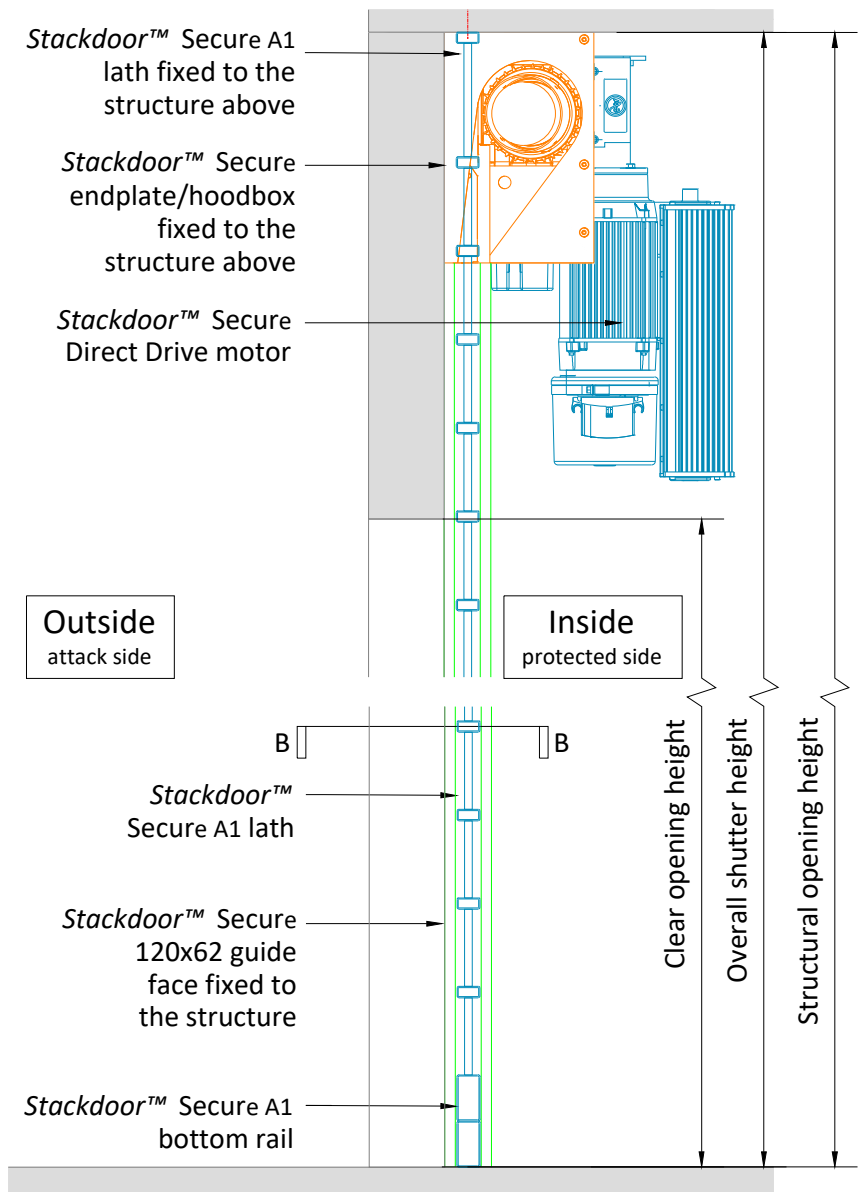


Section (when fully opened)
(scale 1:10)

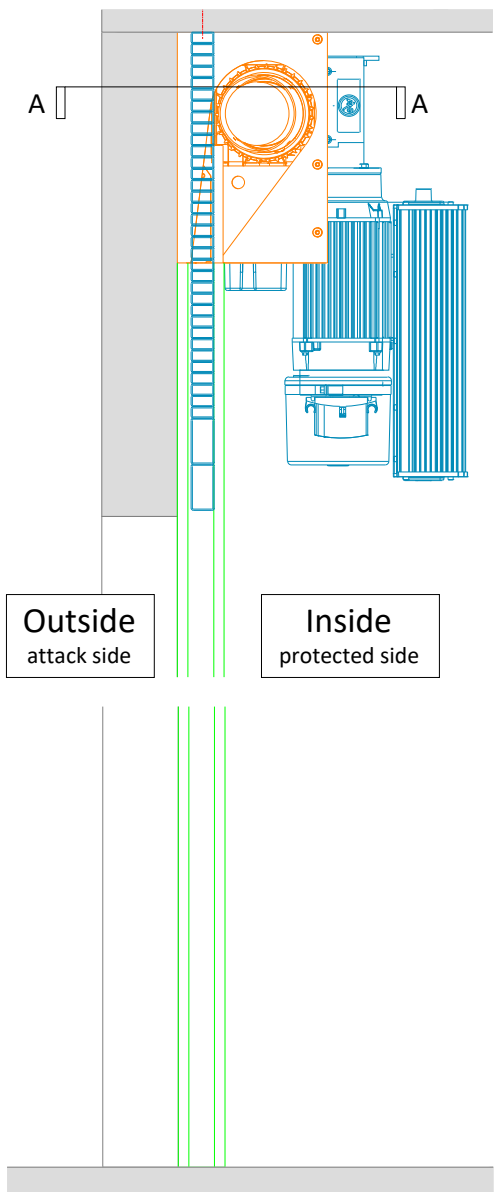


Plan Through: B-B
(scale 1:10)

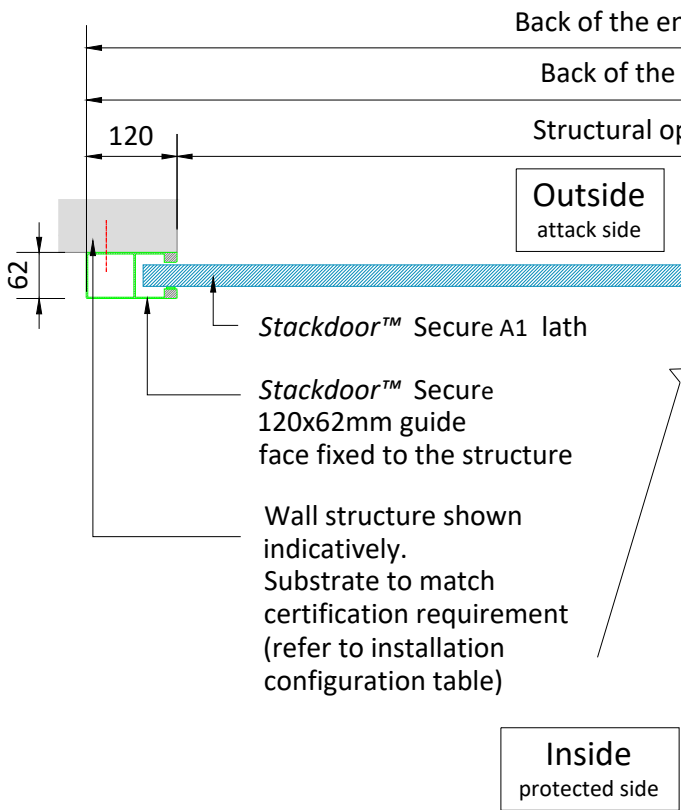

Plan Through: A-A
(scale 1:10)

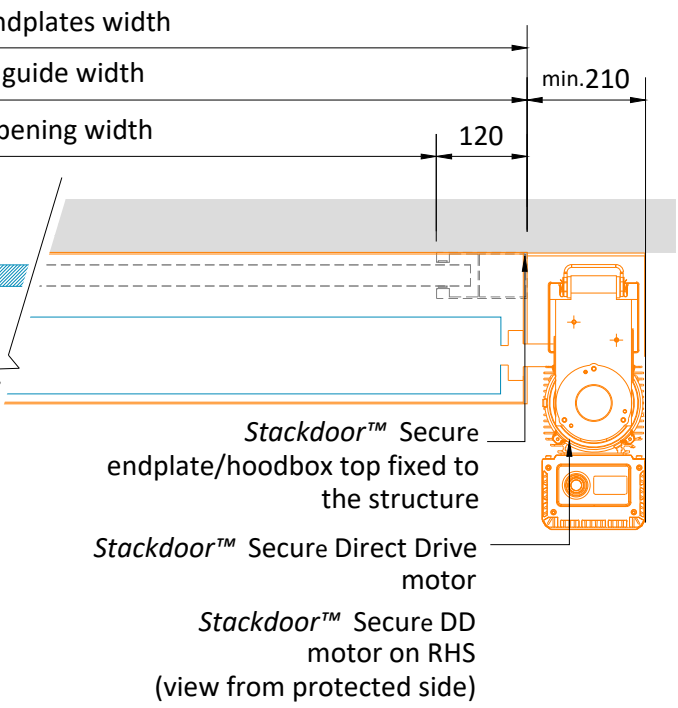

Guide fixing arrangements
(scale 1:10)

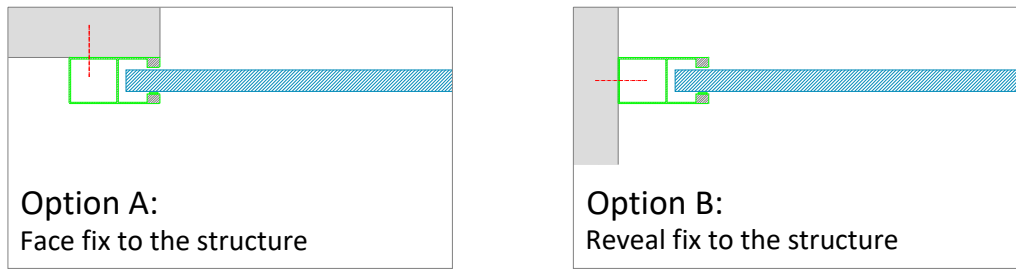

STACKDOOR™ SECURE SPECIALIST SYSTEMS						
Security Rating	Security rating profile	Type	Min. structural opening width (m)	Max. structural opening width (m)	Min. structural opening height (m)	Max. structural opening height (m)
A1 (SR1)	A1 (SR1)	Option A	0.76	6.0	2.0	10.0
A1 (SR1)	A1 (SR1)	Option B	1.0	6.24	2.0	10.0

NOTE: The installation shall be direct to the substrate and not via intermediate substrates, such as plasterboard

Installation Configurations					
Configuration	Substrate				
Option A or Option B	Structural Timber (minimum 120mm wide)	Brickwork	Blockwork	Concrete	Structural Steel (Minimum 3mm thickness and 120mm wide)
	✓	✓	✓	✓	✓

NOTES: 1. This drawing is copyright of Charter Global Ltd and must not be reproduced whole or in part without prior written consent.